## 2N<sup>®</sup> Indoor Talk 2N Answering units





# 2N<sup>®</sup> Indoor Talk

The design of the 2N<sup>®</sup> Indoor Talk answering unit will suit every flat or home. The aesthetic appearance of this product was achieved by using a glass surface and striking backlighting of its icons. However, we placed particular emphasis on selecting the highest-quality audio components in order to achieve a high-quality sound. This means you can talk to visitors outside as if they were standing right next to you. Invite them in and press the icon to open the door from the comfort of your home.

Villas Residential complexes Condominiums Luxury residences

### Luxury design and materials

The 2N<sup>®</sup> Indoor Talk is not only practical, it's also an aesthetic addition to your home. Made from glass and other high-quality materials, its thin body protrudes from the wall by just 10 mm.

### **Modification to your requirements**

Set the required intensity of icon backlighting, choose your favourite ringtone from the 10 available options, or enjoy some peace and quiet by setting the unit to "Do not disturb" mode.

### HD quality sound with high volume

The 2N<sup>®</sup> Indoor Talk uses a HD audio codec and innovative speaker output design, which allows it to achieve a high volume and excellent audio clarity.



#### Precision installation box

The special flush installation box enables you to gently rotate the unit in order to achieve a perfectly horizontal position after the answering unit has been fitted.

#### Concierge call

Power supply

Recommended

Reverse polarity

User interface

power supply

protection

Controls

Operation

Audio

Speaker

Microphone

Туре

Use the 2N<sup>®</sup> Indoor Talk to make calls to not only a 2N IP intercom, but to other corresponding answering units in your home, or to reception in your apartment building.

#### Simple upgrade to a video communicator

The 2N® Indoor Talk can be replaced with a 2N video answering unit without the need for any modification of the existing installation. Both products use the same power supply and installation box.

#### **Doorbell button support**

You can easily connect the doorbell at the entrance to your flat or home directly to the 2N<sup>®</sup> Indoor Talk unit.

#### Parental lock

Interface

Type of input

Contact type

Dimensions

 $(W \times H \times D)$ 

Operating

humidity

altitude

temperature

Relative operating

Recommended

Storage temperature -20 to 70 °C

Weight

Contact parameters

Mechanical properties -

LAN

Socket

It's easy to prevent your children from accidentally letting strangers into your home when playing. Simply press and hold the buttons to activate a parental lock.

#### "Do not disturb" mode

Activate the "Do not disturb" mode to switch off the ringtone at once or at pre-set time intervals. Use this option when you need absolute peace and quiet.

10/100BaseT, RJ-45; Cat5e or better

for doorbell connection

normally open (NO)

185 x 128 x 48.2 mm

387 g

0 to 50 °C


0 - 2000 m

up to 50 V / 5 mA, DC

switch contact (button/relay)

10 to 90 % (non-condensing)

FEATURES & BENEFITS

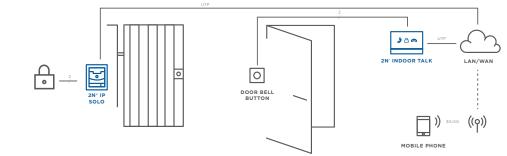

2N <sup>®</sup> IP Verso -	modular	cocurity	intorcom	for	discorping	customore
ZIN IP Verso	- mouular	security	mercom	101	uiscenning	customers

10 to 30 V, up to 12 W or PoE

7 capacitive buttons with RGB LED

Press and hold the RESET button

to restore factory settings, 3 LED

diodes indicating status

802.3af

ves

12 V / 1 A

backlighting

integrated

Induction loop output 600 mV RMS

integrated, 2W

- 2N° IP Solo compact IP intercom ideal for Home Automation
- 2N° IP Force the toughest IP Intercom in the world
- 2N° IP Vario a variable intercom with an elegant design
- 2Nº IP Base stylish IP Intercom with high-quality audio and video
- 2N\* Mobile Video mobile application providing video calls from the intercom to your mobile device
- 2N° Access Commander software to manage 2N IP Intercoms and access units