

UniFi UISP Branding

Q

Search UniFi products

Cancel

Switching WiFi Camera Security Door Access CloudKeys & Gateways Power Tech Inte



Readers > [G3 Reader](#)

Datasheet

In The Box

Marketing Images

Installation Guide

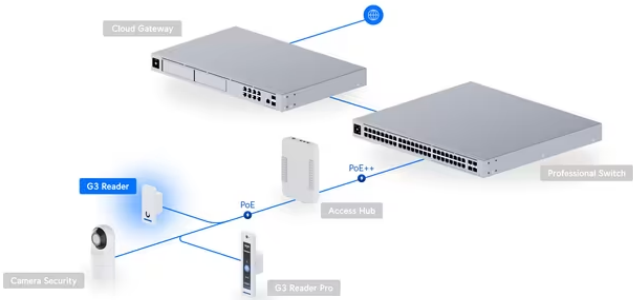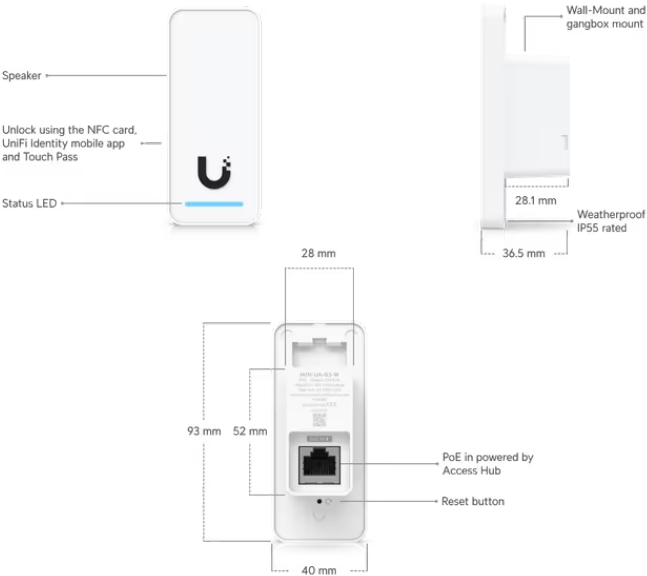

Mechanical

Dimensions	93 x 40 x 36.5 mm (3.7 x 1.6 x 1.4")
Weight	82 g (2.9 oz)
Enclosure material	Polycarbonate, glass
Mounting material	Aluminum alloy
Mounting	In wall, gang box
Weatherproofing	IP55

Hardware

Networking interface	(1) 10/100 MbE RJ45 port
Connectivity	BLE 4.1 NFC
Power method	PoE UL 294 Power-limited Class 2 PSU UL 60950-1/62368-1 LPS/PS2 PSU
Supported voltage range	48V DC
Max. power consumption	5W
ESD/EMP protection	Air: ±15kV, contact: ±8kV
Sensors	Proximity sensor
Speaker	(1) 8 ohm, 0.7W
LEDs	R/G/B/W (Learn more)
Button	(1) Factory-reset
NFC frequency	13.56 MHz
NFC read range	< 30 mm
NFC technology	ISO/IEC 14443A / 14443B / 15693 / 18092 (Ecma 340) MIFARE Classic / MIFARE DESFIRE Sony FeliCa™ (ID only) NFC Forum tags T1T, T2T, T3T, T4T and T5T ECP 2.0
Operating environment	Outdoor use
Ambient operating temperature	-30 to 45° C (-22 to 113° F)
Ambient operating humidity	5 to 90% noncondensing
Software information	The software version of a product can be checked at https://unifi.ui.com
UL 294 level	Destructive attack: Level I Line security: Level I Endurance: Level I Standby power: Level I
UL 294 statement	Compliance with IEEE 802.3 specifications was not verified as part of UL 294. The equipment is intended to comply with the section of the National Electrical Code, ANSI/NFPA 70, Article 725.121, Power Sources for Class 2 and Class 3 Circuits.
PoE cabling requirements	Cable 5e cabling is the minimum performance category recommended. The performance category utilized should match the transmission speed required at the installation site.