

[Wi-Fi](#)
[Switching](#)
[Cloud Keys & Gateways](#)
[Camera Security](#)
[Door Access](#)
[Managed VoIP](#)
[New](#)



Camera Security > [G5 Dome Ultra](#)

Datasheet

In The Box

Marketing Images

Installation Guide

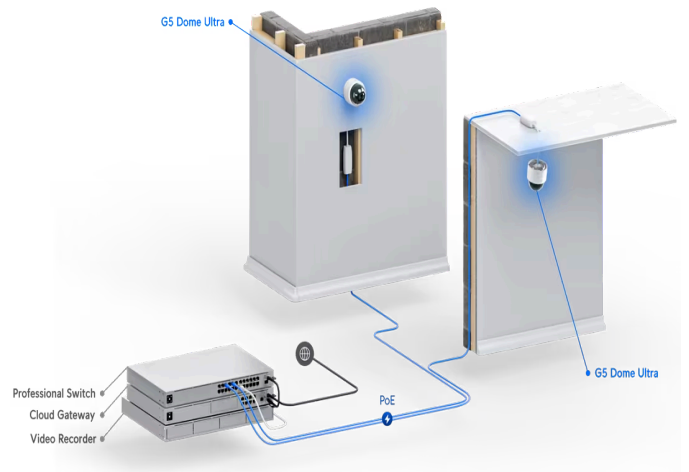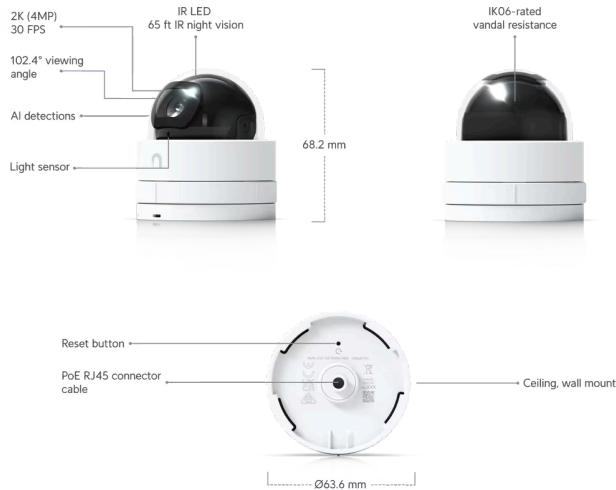

## Mechanical

<b>Dimensions</b>	Ø63.6 x 68.2 mm (Ø2.5 x 2.7")
<b>Weight</b>	175 g (6.2 oz)
<b>Enclosure material</b>	Aluminum alloy, polycarbonate
<b>Mount material</b>	Stainless steel
<b>Resistance</b>	IK06

## Optics

<b>Sensor</b>	1/2.4" CMOS
---------------	-------------

<b>Lens</b>	Fixed focal length
<b>View angle</b>	H: 102.4°, V: 54.9°, D: 120.6°
<b>Night mode</b>	Built-in IR LED illumination and IR cut filter
<b>IR distance</b>	20 m (65 ft)

---

## Video

<b>Resolution</b>	4MP 2688 x 1512 (16:9)
<b>Max. frame rate</b>	30 FPS
<b>Image settings</b>	Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay

---

## System

<b>Processor</b>	Dual-core Arm® Cortex®-A7 based chip
<b>Networking interface</b>	10/100 MbE RJ45 port
<b>Max. power consumption</b>	4.2W
<b>Power method</b>	PoE
<b>Supported voltage range</b>	37-57V DC
<b>Button</b>	Factory reset
<b>Mounting</b>	Surface mount
<b>Ambient operating temperature</b>	-20 to 40° C (-4 to 104° F)
<b>Ambient operating humidity</b>	10 to 90% noncondensing
<b>Certifications</b>	FCC, IC, CE

---

## Software

<b>Web application</b>	UniFi Protect
<b>Mobile app</b>	UniFi Protect iOS™ and Android™