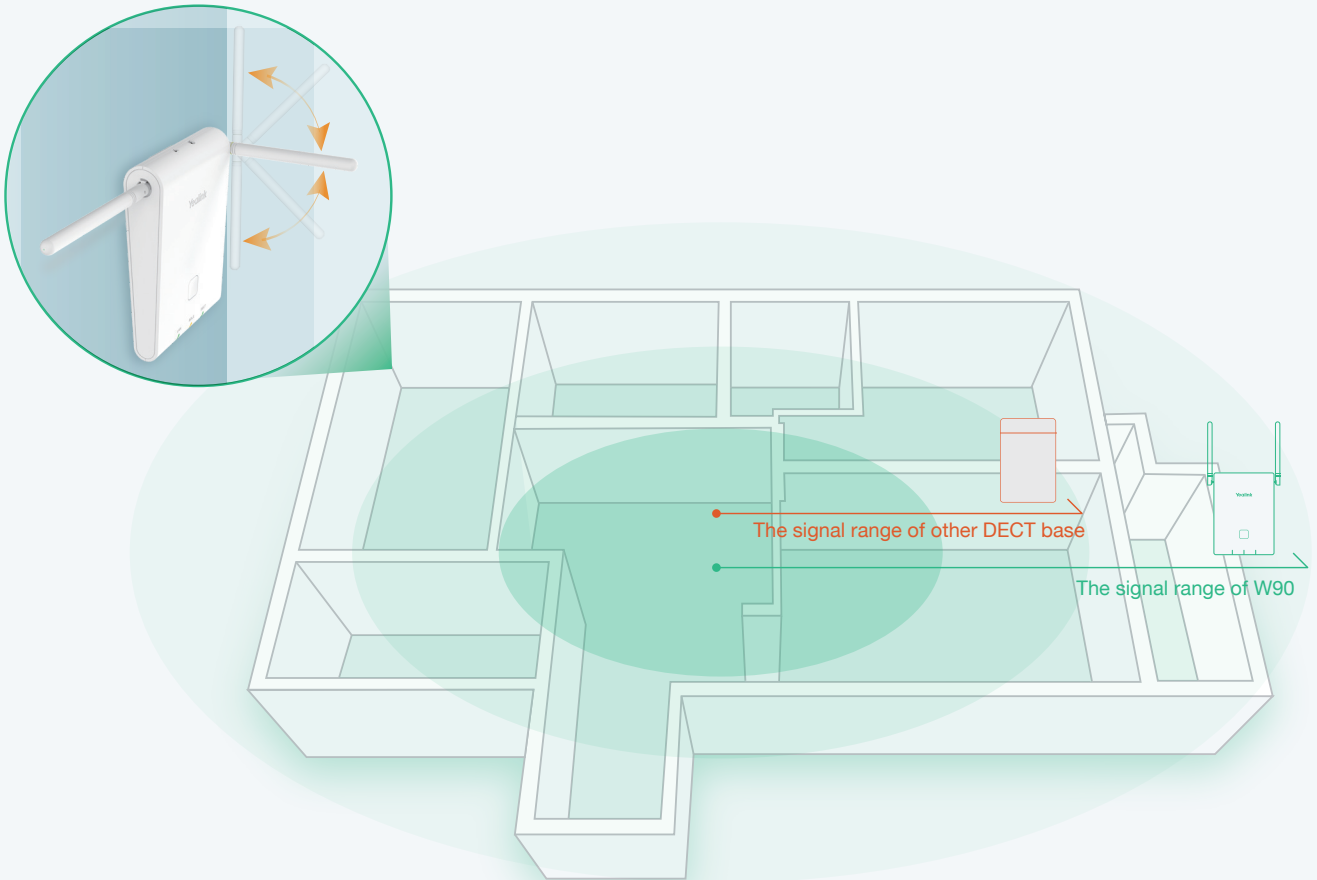# YEALINK W90 DECT IP MULTI-CELL SYSTEM

Stable Roaming Solution for Wide Coverage & Multi-locations

The Yealink W90 DECT IP Multi-Cell System consists of the DECT Manager W90DM and base station W90B. This system provides a seamless handover and industry-leading roaming solution for full scenarios, including warehouses, hospitals, hotels, supermarkets chains, cruises, authorized car dealerships, offices, retail formats, etc.
With stable roaming and simple deployment, Yealink W90 DECT IP multi-cell system ensures fluent communication across wide coverage and multi-locations.

Seamless Stability

The Yealink W90 DECT IP Multi-Cell System brings seamless stability. The external antennas bring further signal range, industry-leading coverage, and flexible steering for complex areas, which truly saves amount and cost of bases in deployment. In poor signal transmission environment and strong signal interference, the Lan Sync guarantees stable roaming.

The signal range of other DECT base

The signal range of W90

Easy Deployment

The Yealink W90 DECT IP Multi-Cell System provides easier and faster setup for users: the DECT Deployment Toolkit for quick base location, IP discovery tool for quickly getting IP of DM, and auto sync level for self-organizing network without manual operation. Besides, bulk registration of handsets is available by importing csv document. Instead of complex steps, it takes less time from deployment to daily management for large system.

DECT Measurement

IP Check Tool

Auto Sync Level

Wide Coverage

Available for 1DM, 60 bases, 250 handsets and 250 parallel calls, the Yealink W90 DECT IP Multi-Cell System is tailored for large space and multi-locations & bases, delivering unified communicating solution especially for warehouses, hospitals, hotels, supermarkets chains, cruises, authorized car dealerships, offices, retail formats, etc. Virtual machines and more bases will be supported in the future, boarding the coverage once more.

60bases

250handsets

Full Scenarios

The Yealink W90 DECT IP Multi-Cell System supports various devices: W53H, W56H, W59R, CP930W, DD Phone, which definitely matches different employee roles and full scenes communicating demand from mobile, desk to conference with flexible scalability.

| CP930W | DD Phone | W59R | W53H | W56H |

Multiple Phone Books

The Yealink W90 DECT IP Multi-Cell System offers easy access to multiple phone books, including Local Directory, Remote Phonebook, LDAP, and XML Phonebook. Additionally, it is broadly compatible with PBX contacts.

W90 DECT IP Multi-Cell System

	Model	W90 DECT IP Multi-Cell System
System	Max. number of bases for system	60
	Max. number of handsets for system	250
	Simultaneous calls for system	250
	Simultaneous calls per base	8
	External antenna	√
	Indoor/Outdoor range	50m/300m
	Handover	Within group
	Roaming	Whole system
	Air Synchronization	√
	LAN Synchronization	√
	Handset module for W90B	W53H/W56H/W59R/CP930W/DDPhone(T41S+DD10K)
	OTA for handset	√
Audio	Wideband codecs	AMR-WB (optional), G.722
	Narrowband codecs	PCMU, PCMA, G.726, G.729, iLBC
	HD voice	√
Interface	Ethenet interface	10/100M
	PoE	√
	Wall mountable	√
Features	LDAP	√
	XML Phonebook	√
	Broadsoft directory (User & Company)	√
	BroadSoft call log	√
	User access level	√
	Auto Sync Level	√
	IPUI registration	√
	DM Backup	√
	XML browser	√
	Shared Call Appearance (SCA)	√
	DECT encryption	√
	Transport Layer Security (TLS)	TLS1.0/1.1/1.2
	SRTP Support (Media)	√
Compatibility	BroadSoft	√
	3CX	√
	Metaswitch	√